

## TFM SERIES ENGINEERING INFORMATION

**The TFM-450 is a top of the range professional bi-amped floor monitor for use for all types of demanding monitoring applications.**

The TFM-450 utilises all neodymium components, resulting in an ultra-lightweight product of only 32kg total net weight. This makes handling and shipping extremely easy and cost-effective. It incorporates a custom designed 4" voice coil, neodymium 15" low frequency driver, and a high power 3" diaphragm neodymium HF compression driver on a custom 40° x 60° waveguide in a compact vented enclosure.

The drive units are mounted side by side on a 37° baffle, producing a small footprint which results in a highly efficient wedge monitor package, ideal for use wherever high SPL and exceptional intelligibility is required. A low box profile is maintained, thereby improving sightlines, by mounting the HF horn alongside, rather than on top of, the low frequency driver. The HF horn pattern is designed to give very even coverage both close to, and standing back from, the monitor while at the same time minimising sound spillage into adjacent microphones. As a result the TFM-450 offers impressive feedback rejection, developing

high sound pressure levels without the need for excessive equalisation.

The TFM-450 has been designed as a symmetrical mirror-image monitor, allowing multiple units to be used on larger stages with one monitor inverted to form left and right pairs.

The cabinet is constructed from 3/4" (18mm) birch plywood, and is finished in black semi-matt textured paint. Recessed connector panels are fitted at both ends of the cabinet, each with a Speakon NL4MP connector. This arrangement allows for neat interconnection between units. A pole mount enables use with poles and loudspeaker stands. Side mounted flush handles are provided for easy lifting and handling. A black powder coated perforated steel mesh wrap-around grille protects the drive units from damage.

The TFM-450 is used together with Turbosound loudspeaker management systems, which offer steep slope fixed crossovers and true r.m.s. output limiting functions.



### FEATURES

- Neodymium components
- Symmetrical enclosure
- High spec components
- Controlled dispersion
- Pole mount socket
- Speakon connectors

### APPLICATIONS

- Vocal monitoring
- Horn sections
- Drum fills
- Front of house

<b>DIMENSIONS (HxWxD)</b>	401mm x 711mm x 475mm (15.8" x 28" x 18.7")										
<b>NET WEIGHT</b>	32 kg (70.4 lbs)										
<b>COMPONENTS</b>	1 x custom 15" (381mm) LF driver, 1 x 3" (76mm) diaphragm HF driver on a custom flare										
<b>FREQUENCY RESPONSE<sup>1</sup></b>	60Hz - 16kHz ±4dB										
<b>NOMINAL DISPERSION<sup>2</sup></b>	40°H x 60°V @-6db points										
<b>POWER HANDLING</b>	LF: 400 watts r.m.s., 800 watts program, 1000 watts peak HF: 100 watts r.m.s., 200 watts program, 250 watts peak Recommended amplifier power: LF: 800 watts @ 8 ohms; HF: 200 watts @ 8 ohms										
<b>SENSITIVITY<sup>3</sup></b>	LF: 99dB, HF: 103dB 1 watt @ 1 metre										
<b>MAXIMUM SPL</b>	130dB continuous <sup>4</sup> , 136dB peak <sup>5</sup>										
<b>CROSSOVER</b>	Active only: Recommended point 1k3Hz, 24dB/octave slope, Linkwitz-Riley										
<b>NOMINAL IMPEDANCE</b>	LF: 8 ohms; HF: 8 ohms										
<b>CONSTRUCTION</b>	18mm (3/4") birch plywood throughout; rebated, screwed and glued. Finished in black semi-matt textured paint. Two recessed carrying handles										
<b>GRILLE</b>	Black powder coated perforated steel										
<b>CONNECTORS</b>	(2) Speakon NL4MP wired pin 1+: LF positive, pin1-: LF negative, pin 2+: HF positive, pin 2-: HF negative										
<b>SPARES AND ACCESSORIES</b>	<table border="0"> <tr> <td>LS-1513</td> <td>381mm (15") LF loudspeaker</td> </tr> <tr> <td>RC-1513</td> <td>Recone kit</td> </tr> <tr> <td>CD-213</td> <td>50mm (2") HF compression driver</td> </tr> <tr> <td>RD-213</td> <td>Replacement diaphragm</td> </tr> <tr> <td>MG-450</td> <td>Replacement perforated metal grille</td> </tr> </table>	LS-1513	381mm (15") LF loudspeaker	RC-1513	Recone kit	CD-213	50mm (2") HF compression driver	RD-213	Replacement diaphragm	MG-450	Replacement perforated metal grille
LS-1513	381mm (15") LF loudspeaker										
RC-1513	Recone kit										
CD-213	50mm (2") HF compression driver										
RD-213	Replacement diaphragm										
MG-450	Replacement perforated metal grille										

All measurements are actual figures taken from real-time testing using stated inputs, free from any filtering or weighting. Therefore actual figures may significantly exceed that of other manufacturers with higher published weighted ratings.

Notes

<sup>1</sup>Measured on axis


<sup>2</sup>Average over stated bandwidth

<sup>3</sup>Average over stated bandwidth


<sup>4</sup>Unweighted diode-clipped pink noise. Measured in a half space environment

<sup>5</sup>Verified by subjective listening tests of familiar program material, before the onset of perceived signal degradation

**FREQUENCY RESPONSE**

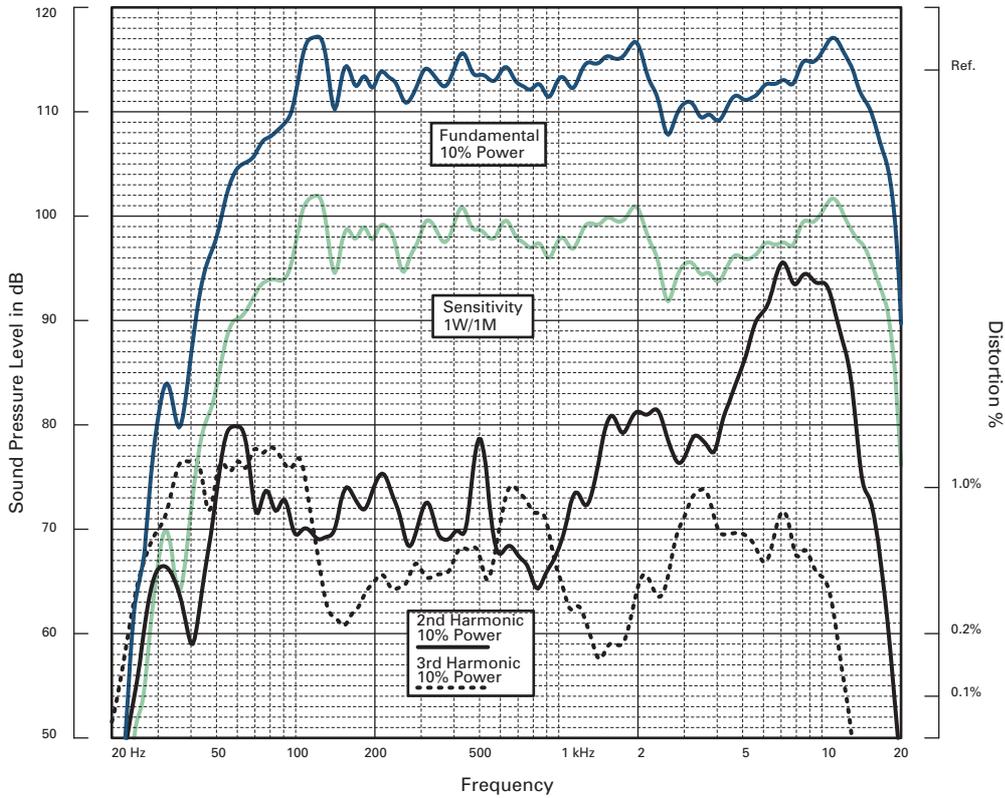

**IMPEDANCE**

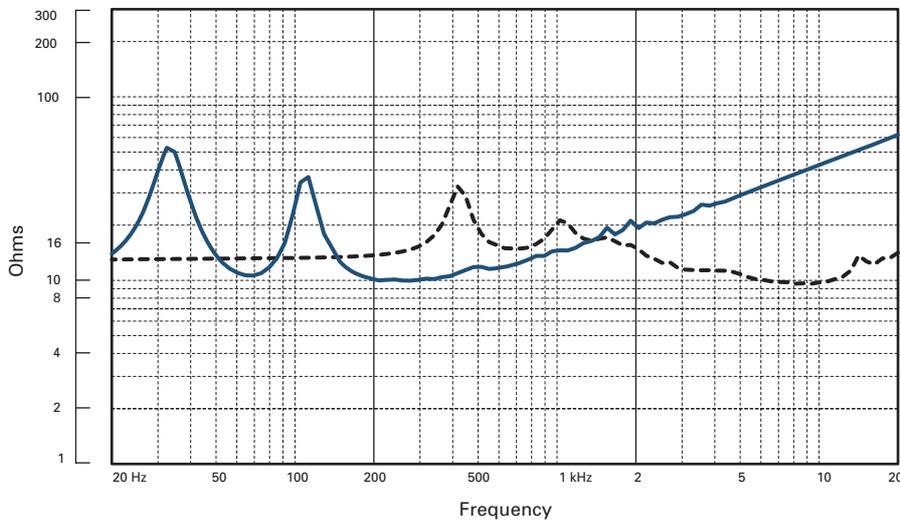

Impedance A constant current circuit was used to measure the impedance. Frequency response The frequency response shown was obtained by feeding a swept sine wave through the system in a half space environment. The position of the microphone was vertically on-axis at a distance of 2 metres, then scaled to represent 1 metre. 2nd & 3rd Harmonic Distortion Distortion measurements were obtained using an Audio Precision harmonic distortion analysis system and comply with AES recommendations for enclosure measurement (AES paper ANSI S4-26-1984). Data Conversion All graphs were digitally generated using the APEX custom software system, designed to translate data derived from Audio Precision 'System One' test equipment into AutoCAD™. This program enables graphical information to be plotted to a high degree of accuracy.

**NOTES ON MEASUREMENT CONDITIONS**

**ARCHITECTURAL  
& ENGINEER'S  
SPECIFICATIONS**

The loudspeaker shall be of the bi-amped, two-way type consisting of one 381mm (15") low-frequency loudspeaker and one 76mm (3") diaphragm, 38mm (1.5") exit high frequency compression unit. Performance specifications of a typical production unit shall meet or exceed the following: Frequency response, measured with swept sine wave input, shall be flat within  $\pm 4\text{dB}$  from 60Hz – 16kHz. Dispersion at -6dB points shall average  $40^\circ \times 60^\circ$ . Nominal impedance shall be LF: 8 ohms, HF: 8 ohms. Power handling shall be LF: 400 watts rms, 800 watts program, 1000 watts peak; HF: 100 watts r.m.s., 200 watts program, 250 watts peak. Sensitivity measured with 1 watt input at 1 metre distance on-axis, mean averaged over stated bandwidth, shall be LF: 99dB, HF: 103dB. Maximum SPL (peak), measured with music program at stated amplifier power, shall be 136dB. Dimensions: 401mmH x 711mmW x 475mmD ( $15.8'' \times 28'' \times 18.7''$ ). Weight: 32 kg (70.4lbs) The loudspeaker shall be the Turbosound TFM-450. No other loudspeaker shall be acceptable unless submitted data from an independent test laboratory verify that the above combined performance/size specifications are equalled or exceeded.

**DIMENSIONS**

